



Společnost Crevis rozšiřuje svou nabídku o nové verze vstupních a výstupních modulů

G-Series Combination Input/ Output modules

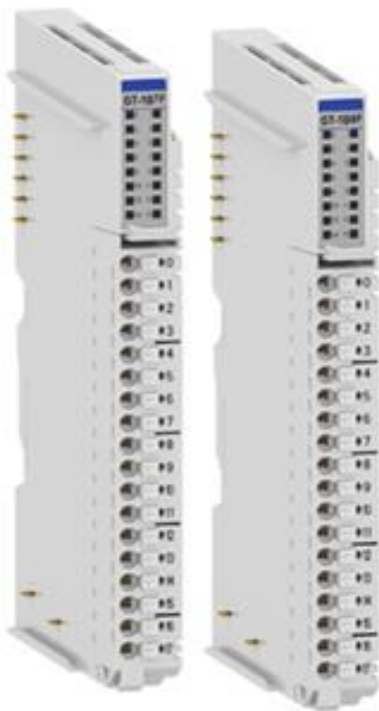

The IO-16 combination digital I/O module by setting the parameter.

Example)

- Input : Max 16 points
- Output : Max 16 points
- 8 input points + 8 Output points
- 2 input points+ 14 Output points



Model	GT-1B7F	GT-1B8F
Description	16 points Digital Input or Output (I/O type can be selectable.)	
	Sink Input/ Source Output, 24Vdc	Source Input / Sink Output, 24Vdc
On-state voltage (\leq Field Power)	24Vdc nominal, 15 ~ 28.8 Vdc @ 60°C	
On-state current	3.2mA @ 24Vdc 3.8mA @ 30Vdc	2.3mA @ 24Vdc 2.9mA @ 30Vdc
Off-state voltage	12.5Vdc @ 25°C	13.0Vdc @ 25°C
Input signal delay	OFF to ON : 0.4ms Max ON to OFF : 0.5ms Max	OFF to ON : 0.5ms Max ON to OFF : 0.5ms Max
Power dissipation	Max. 60mA @ 5Vdc	
Dimensions	12mm x 109mm x 70mm	

※After setting the parameter, Please reset the module

Pro více informací kontaktujte našeho produktového specialistu:

Ing. Jan Krajčovič
tel. 595 691 186
krajcovic@accs.cz